

A SAMPLE BOOK cannot show the true beauty of Flexwood. It can only show the general character and coloring of the more generally used woods.

Flexwood is made of genuine wood veneers cut to an approximate thickness of 1/85 of an inch and mounted on cotton sheeting with a water-resistant adhesive under heat and hydraulic pressure.

A patented flexing operation alters the cellular unity of the wood to produce a limp, pliable sheet which may be applied by hand to any smooth surface, flat or curved. Flexwood Adhesive, which makes a permanent bond, is used to apply Flexwood.

Dry plaster, steel, plywood, hard wallboards, tile, marble, glass, etc. make perfect backgrounds for Flexwood. Because it is genuine wood, Flexwood takes any wood finish.


Standard widths are 18" and 24" and lengths run from 8' to 12'. Available lengths should be determined in advance because they may vary.

A perfect installation may be obtained by preparing definite specifications and following the instructions.

Specification writers should take the necessary precaution to provide for dry, smooth, hard plaster. Application on wet walls is doomed to failure. Plaster for Flexwood should be rodded and lime content kept to a minimum. High lime content is a hazard because the wall will have a tendency toward chalkiness and the lime may stain certain woods. Flexwood should never be specified for application on plastering done directly on exterior masonry which has not been properly damp-proofed. Flexwood should never be specified for application to *lumber* and when applied to plywood, the grain of the Flexwood *must be parallel* to the face grain of the plywood.

Specifications should insist that workmen follow our instructions for the mechanical application. These instructions are packed with each shipment.

Flexwood is distributed in your territory by

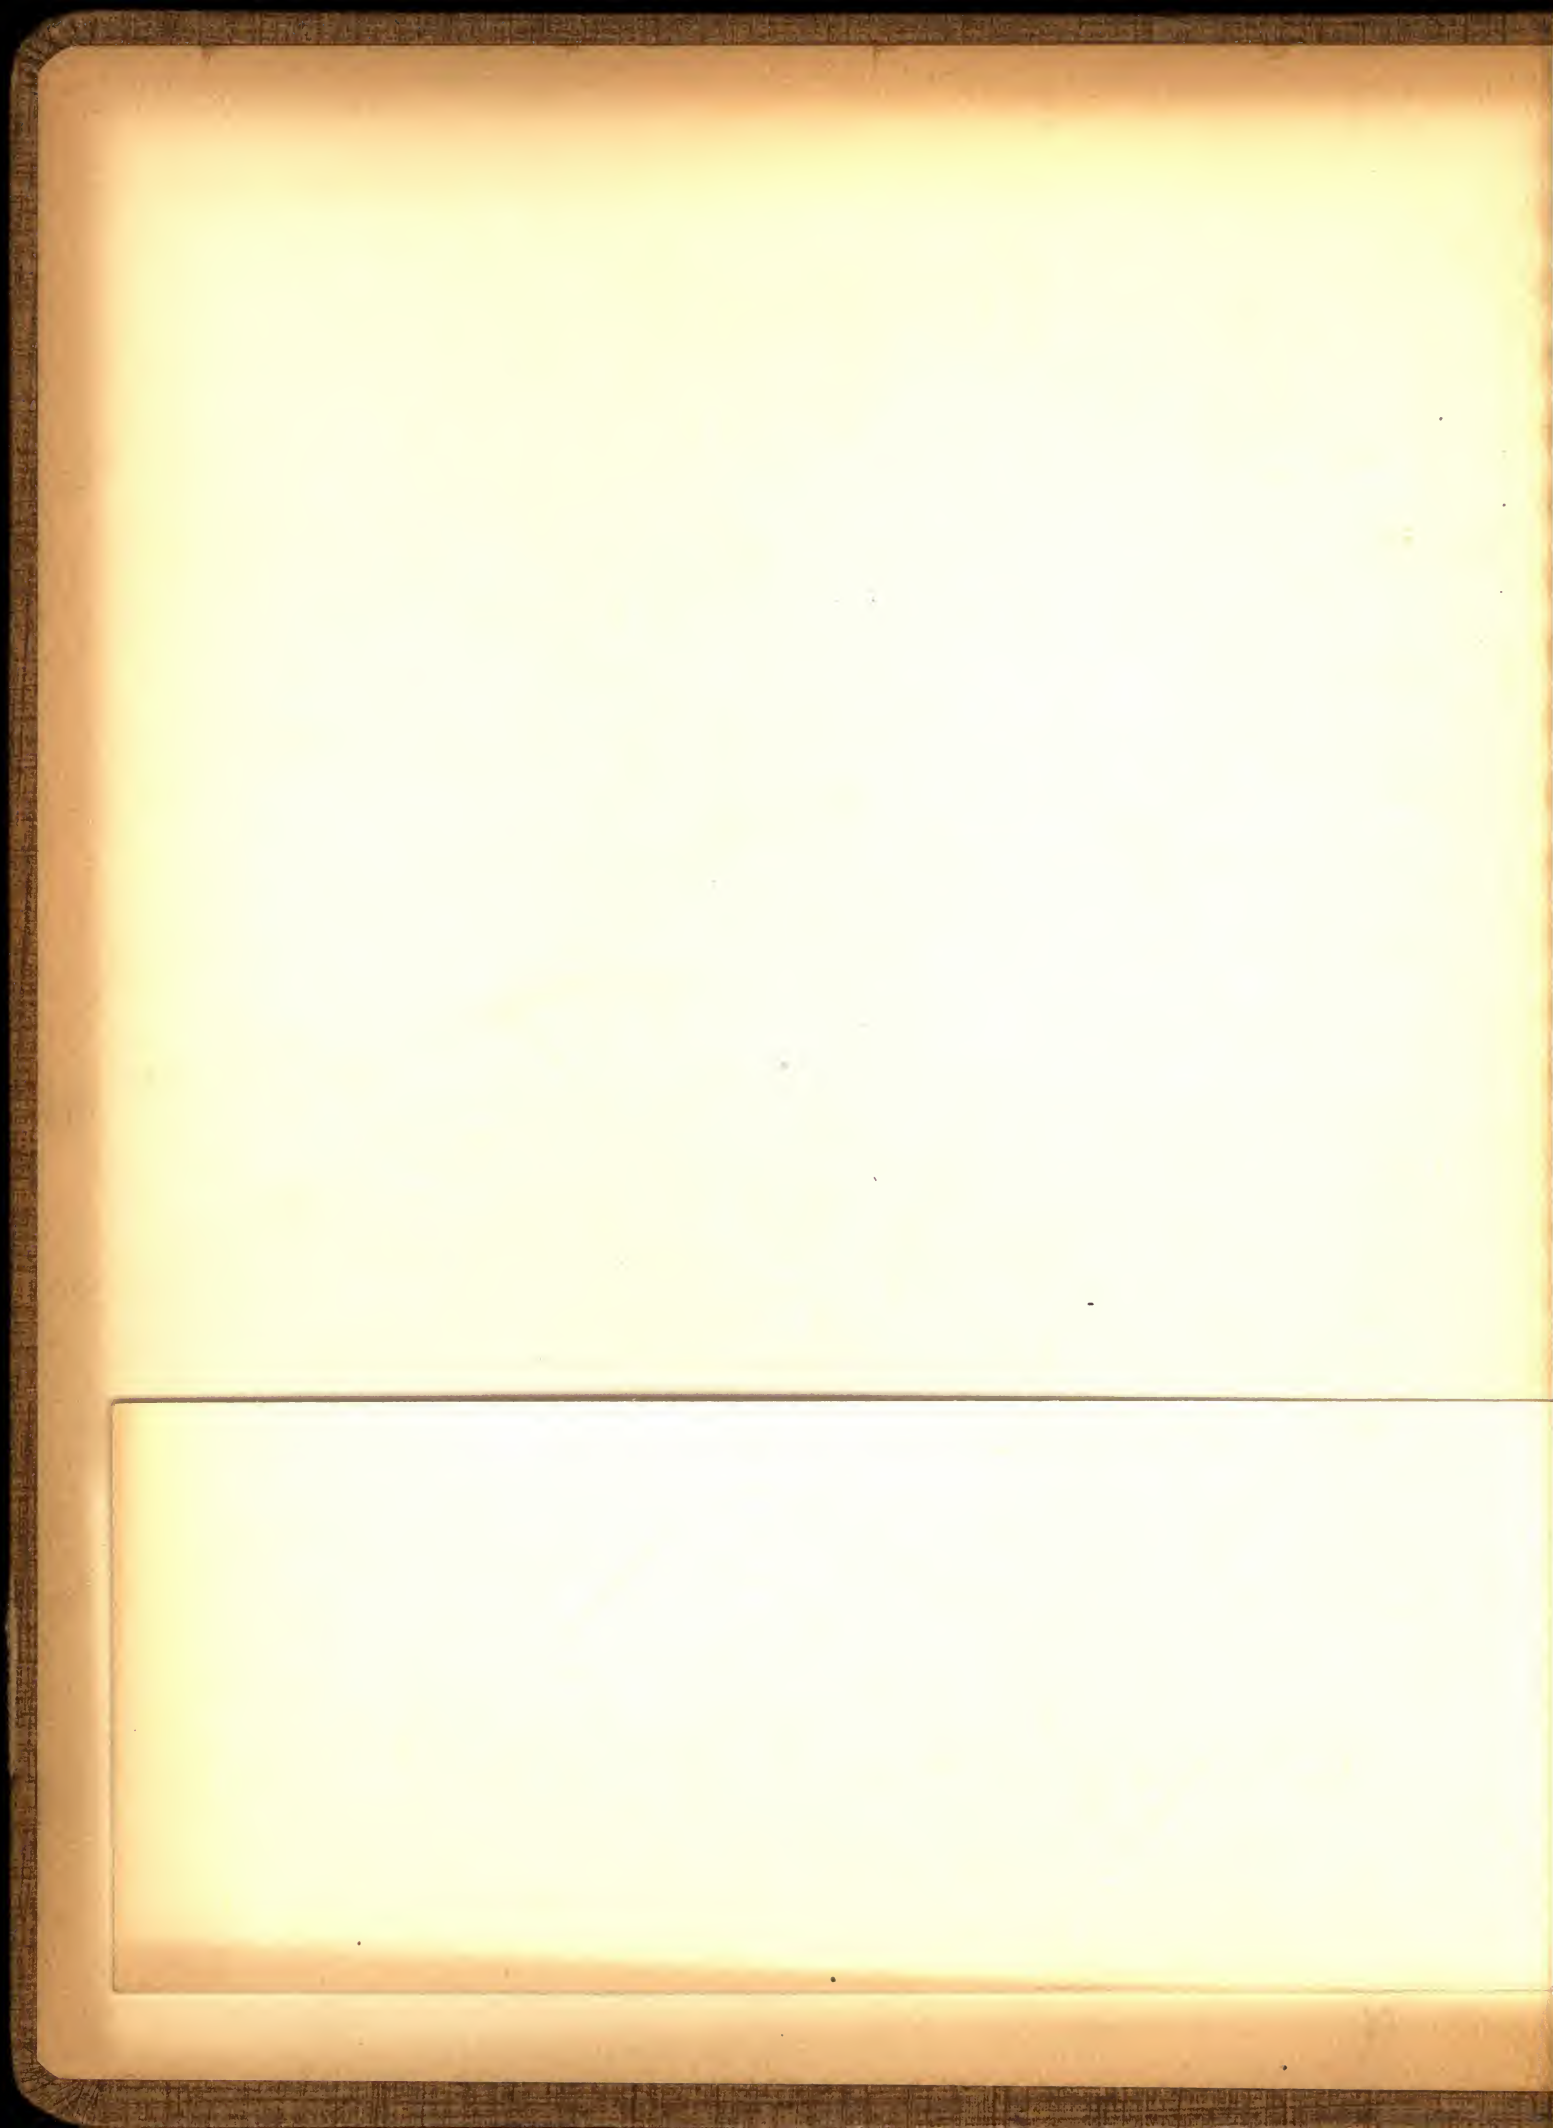



A SAMPLE BOOK cannot show the true beauty of Flexwood. It can only show the general character and coloring of the more generally used woods.

Flexwood is made of genuine wood veneers cut to an approximate thickness of 1/85 of an inch and mounted on cotton sheeting with a water-resistant adhesive under heat and hydraulic pressure.

A patented flexing operation alters the cellular unity of the wood to produce a limp, pliable sheet which may be applied by hand to any smooth surface, flat or curved. Flexwood Adhesive, which makes a permanent bond, is used to apply Flexwood.

Dry plaster, steel, plywood, hard wallboards, tile, marble, glass, etc. make perfect backgrounds for Flexwood. Because it is genuine wood, Flexwood takes any wood finish.

Standard widths are 18" and 24" and lengths run from 8' to 12'. Available lengths should be determined in advance because they may vary.

A perfect installation may be obtained by preparing definite specifications and following the instructions.


Specification writers should take the necessary precaution to provide for dry, smooth, hard plaster. Application on wet walls is doomed to failure. Plaster for Flexwood should be rodded and lime content kept to a minimum. High lime content is a hazard because the wall will have a tendency toward chalkiness and the lime may stain certain woods. Flexwood should never be specified for application on plastering done directly on exterior masonry which has not been properly damp-proofed. Flexwood should never be specified for application to *lumber* and when applied to plywood, the grain of the Flexwood *must be parallel* to the face grain of the plywood.

Specifications should insist that workmen follow our instructions for the mechanical application. These instructions are packed with each shipment.

When possible, Flexwood work should be considered a separate contract under the general contract and be let accordingly.

After deciding upon the species of wood to use, you should advise your Flexwood distributor as to the approximate quantity required. He will then instruct the factory to reserve sufficient veneer for your job and submit a full size flitch *sample of that lot of veneer* to you for approval. There is no additional charge for this service and you are urged to make full use of it.

Flexwood is manufactured and marketed jointly by the United States Plywood Corporation, New York and The Mengel Company, Louisville, Kentucky

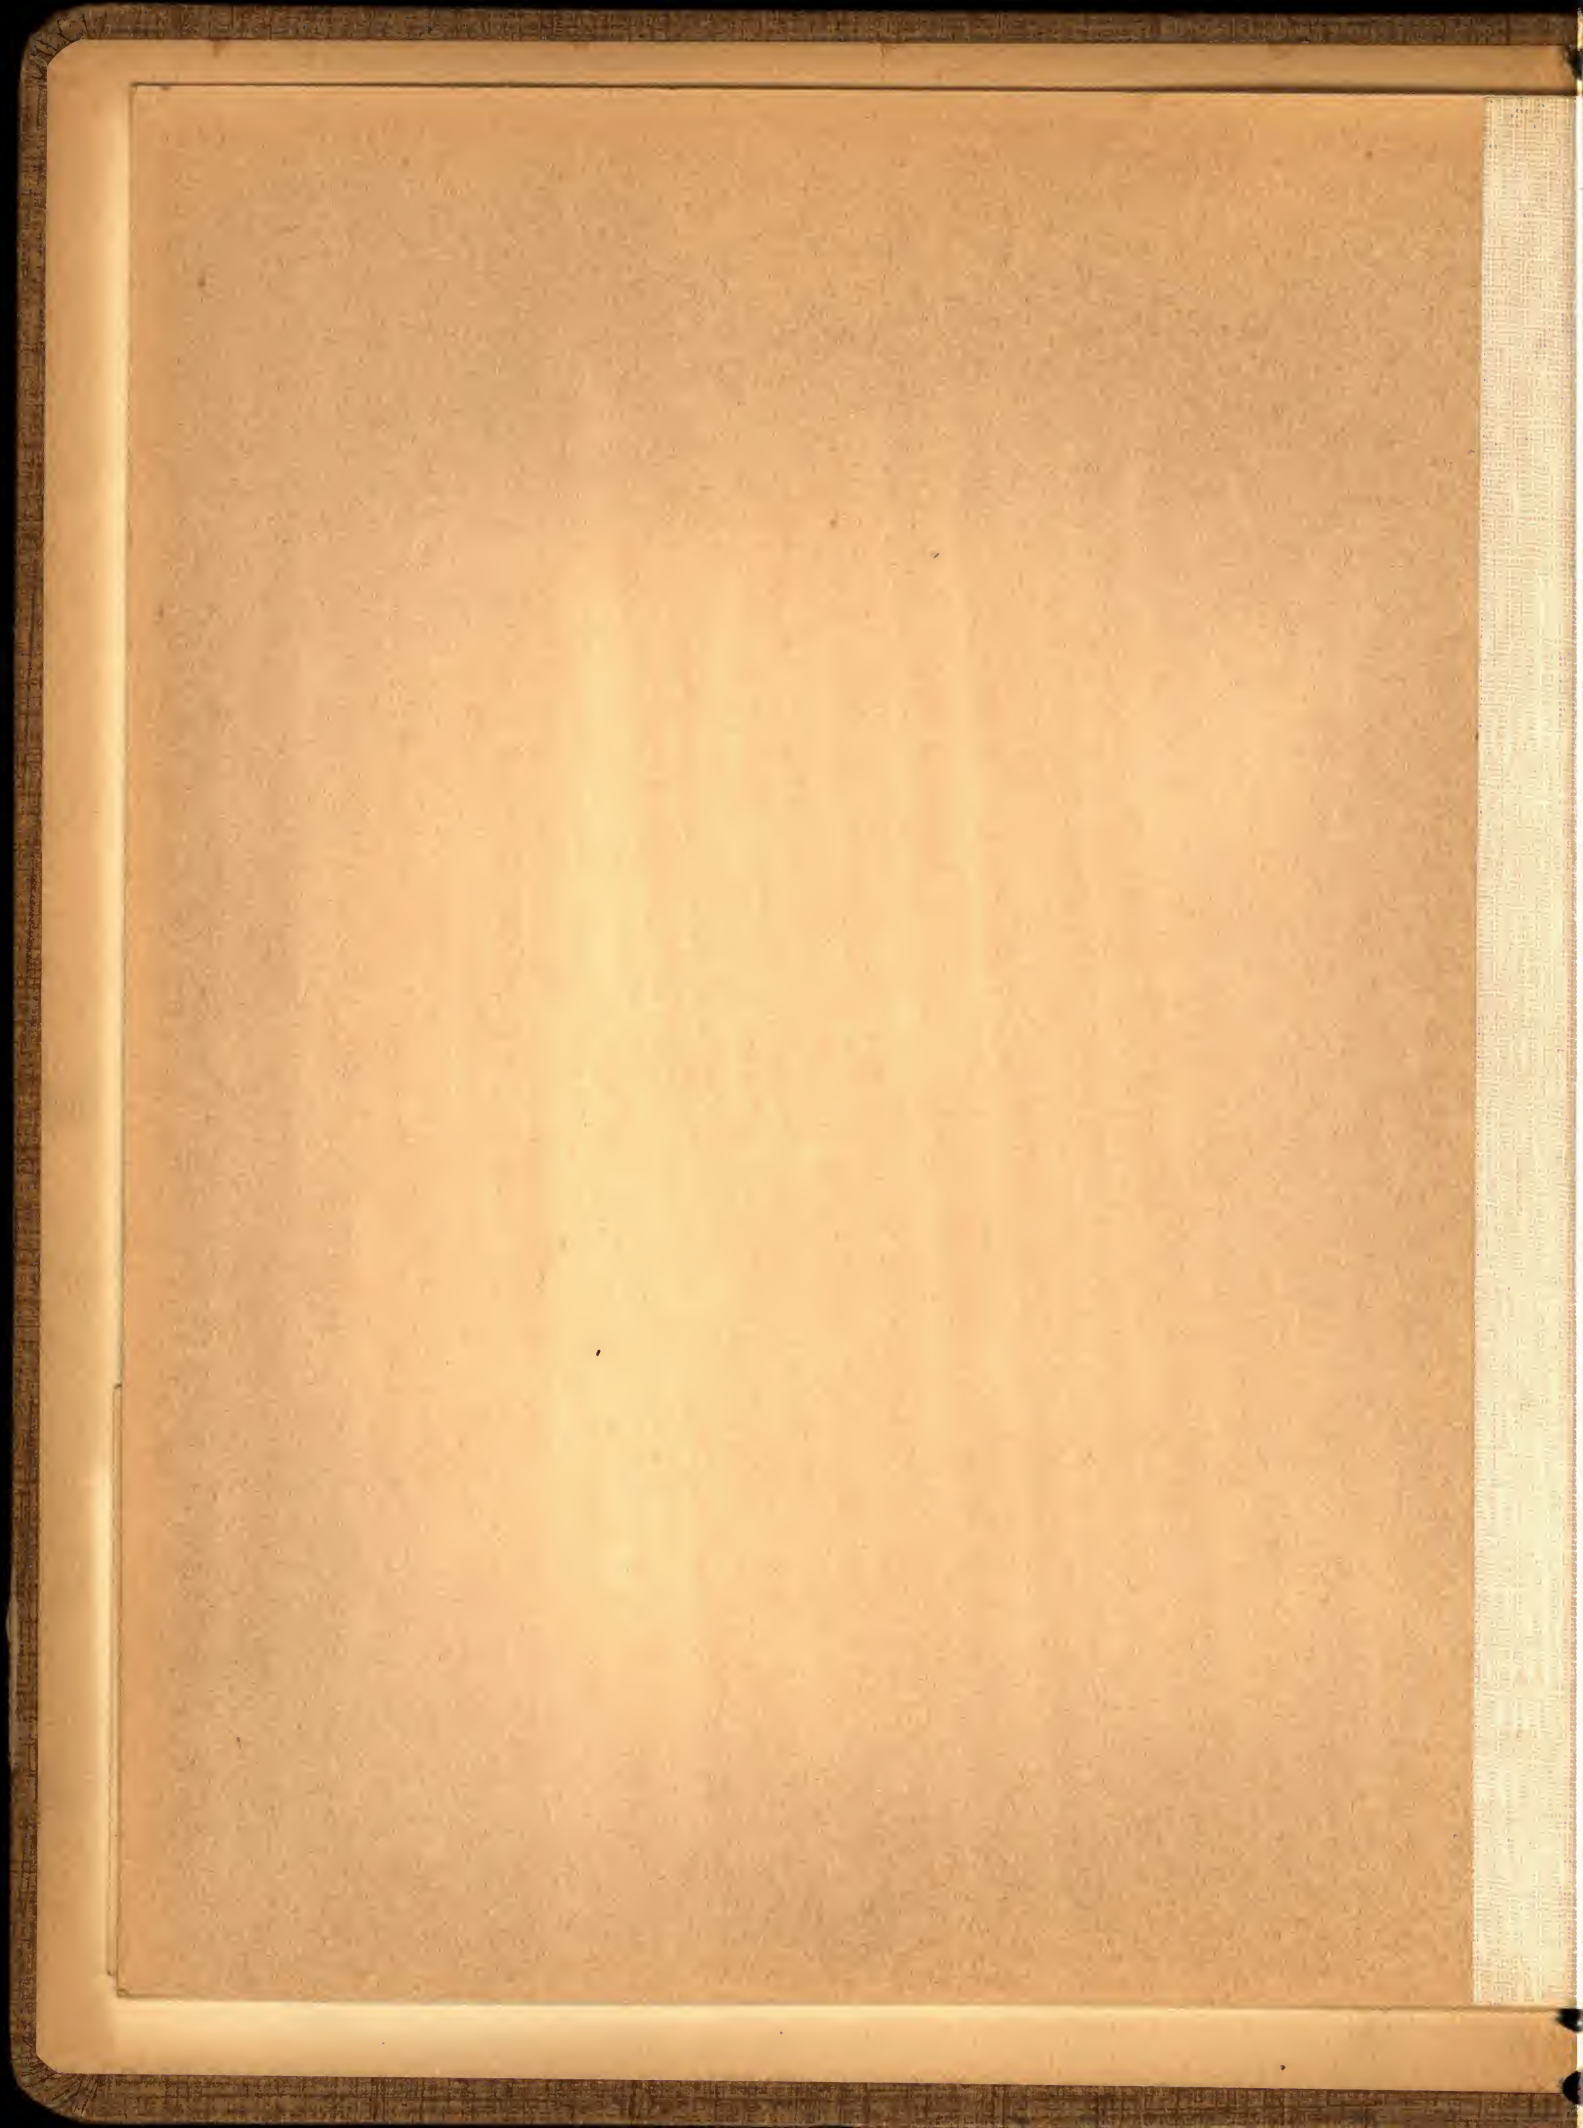



flexwood

MADE IN U.S.A. PAT. NO. 1,815,574

FLEXWOOD DIVISION
UNITED STATES PLYWOOD CO.

22-27-41

NE.
Y.


QUARTERED WALNUT



flexwood

ALERTWOOD DIVISION
UNITED STATES DEPARTMENT OF AGRICULTURE
WASHINGTON, D. C.

FIG. QTD. WALNUT

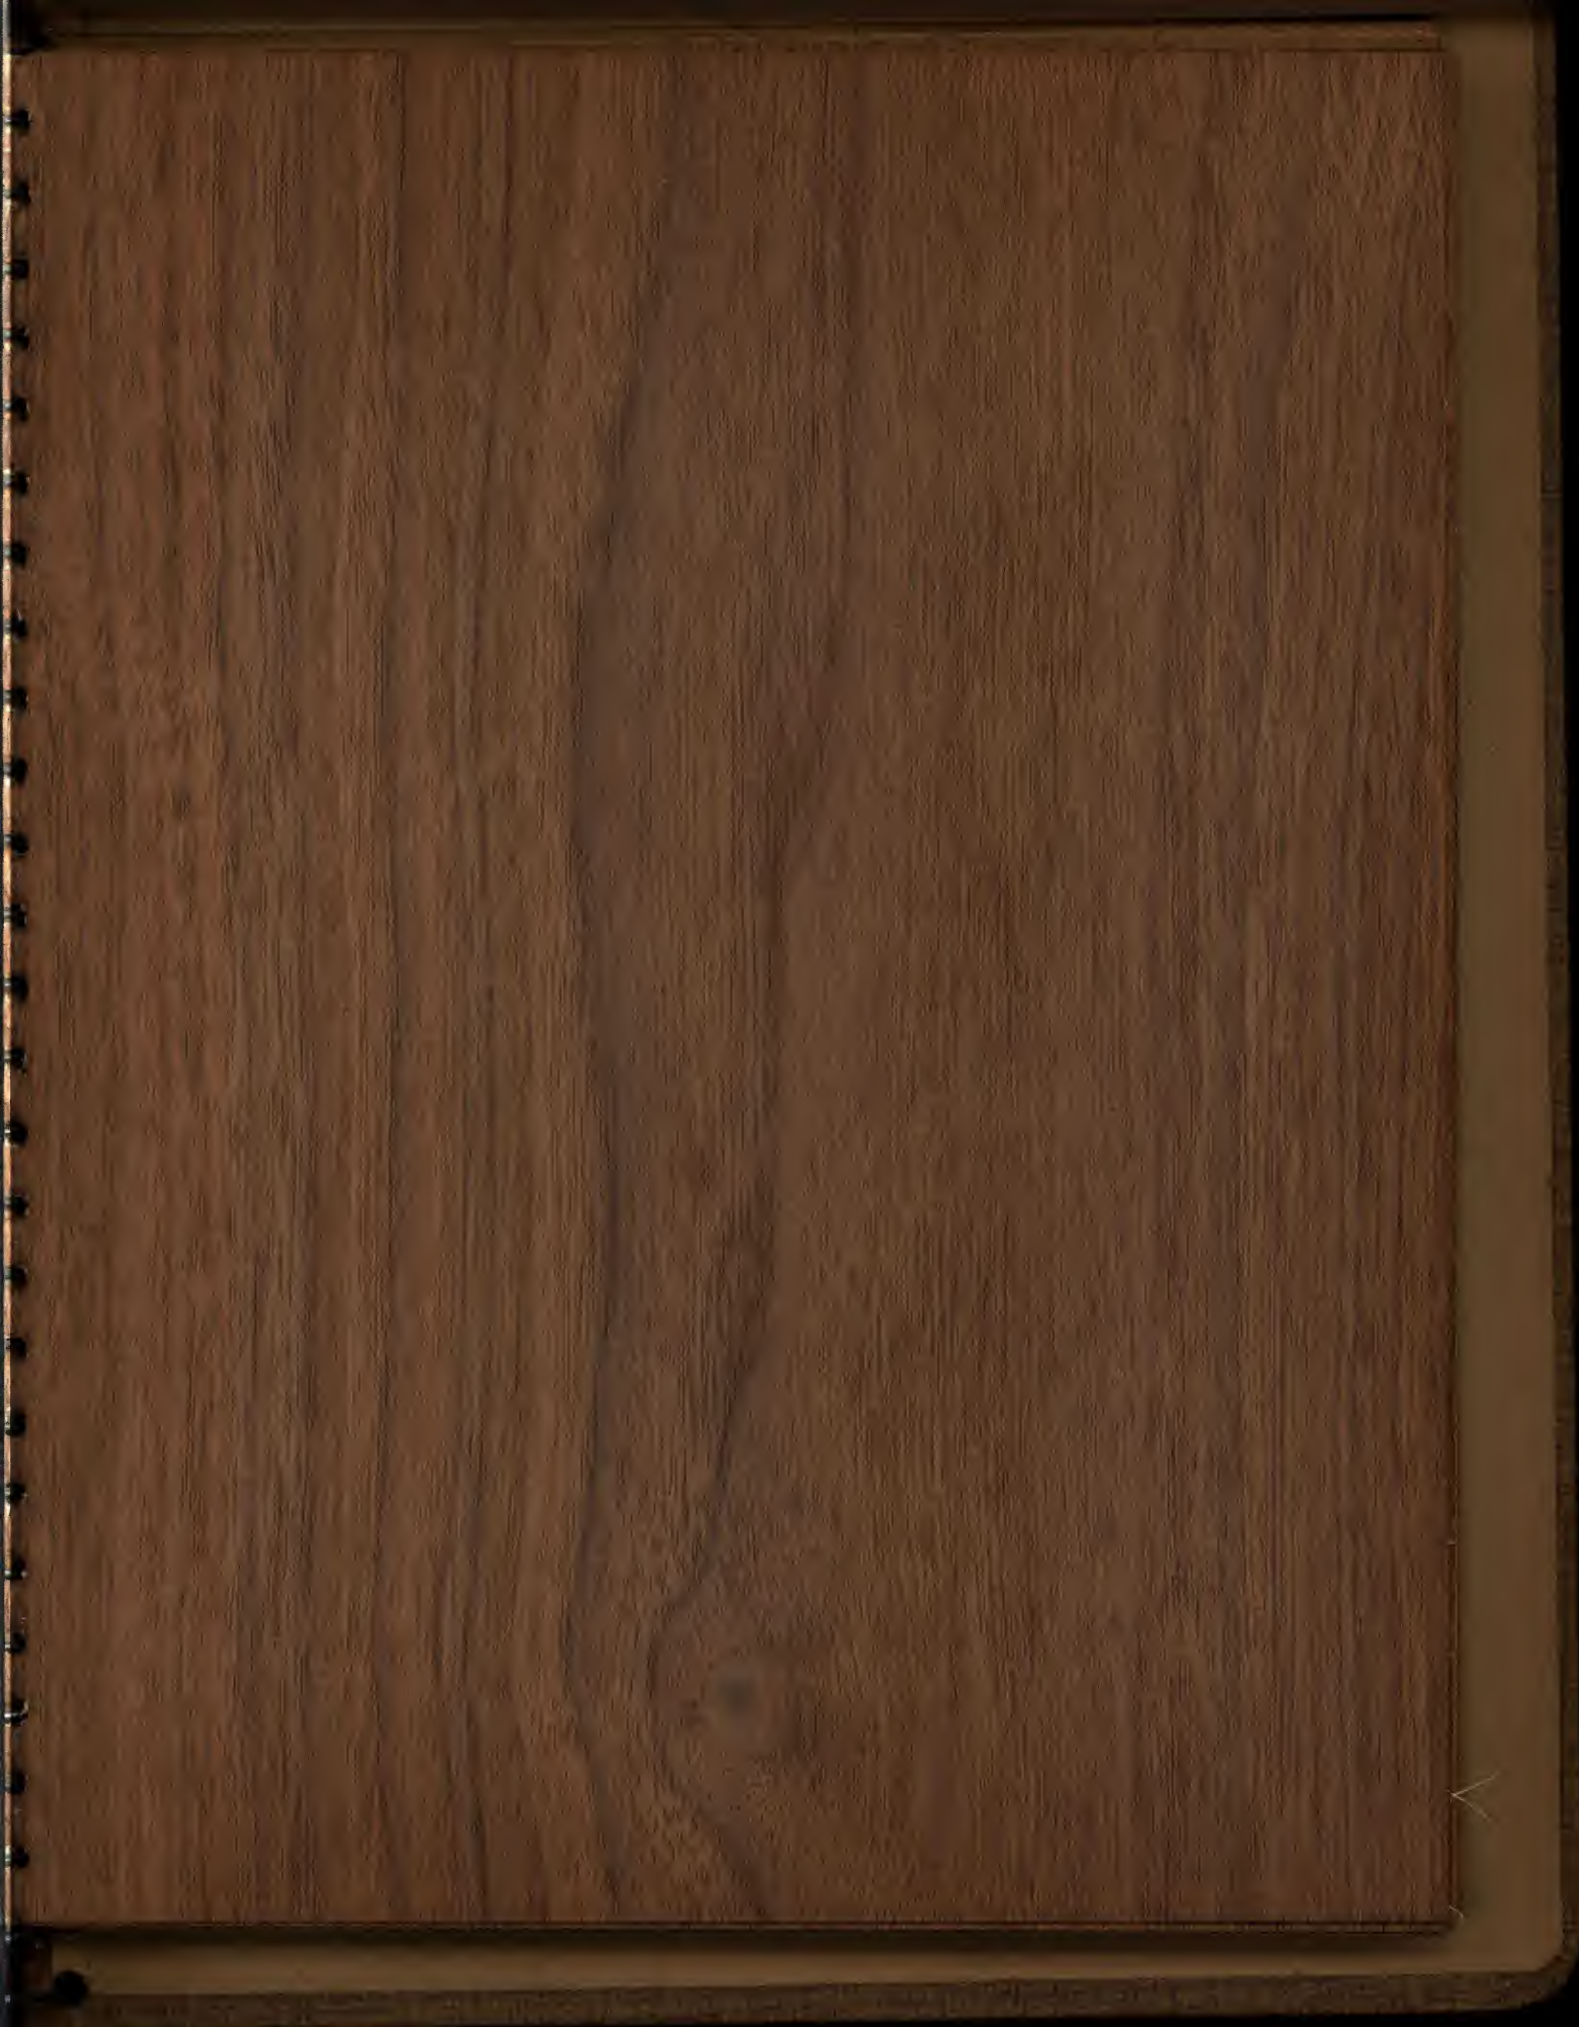



NEW ALBANY, IND.

EST. 1872

UNION

PLANT GUY WALNUT



flexwood

REG. U.S. PAT. OFF. PAT. NO. 2,816,778



**FLEXWOOD DIVISION
UNITED STATES PLAYGOLD CO., INC.**

800 NORTH 3RD ST. ST. LOUIS, MO. 63101

FIG. F. C. WALNUT



flexwood

MADE IN U.S.A. - PATENTED - REGISTERED

FLEXWOOD DIVISION
UNITED STATES

IS WASH.

F. C. KENTZANY



Flexwood

MADE IN U.S.A. PAT. NO. 2,345,678

FLEXWOOD DIVISION
UNITED STATES FLEXWOOD

INC.

RIBBON MAHOGANY



flexwood

ASA U.S. PAT. OFF. PAT. NO. 1,819,738

PLASTIC DIVISION
UNITED STATES OF CO., INC.
15 West 44th St. New York, N. Y.

SAPOLI



flexwood

REG. U. S. PAT. OFF.




PAT. NO. 1,810,725

FLEXWOOD DIVISION

UNITED STATES PLYWOOD CORP.

New York, N. Y.

FLAT CUT OAK

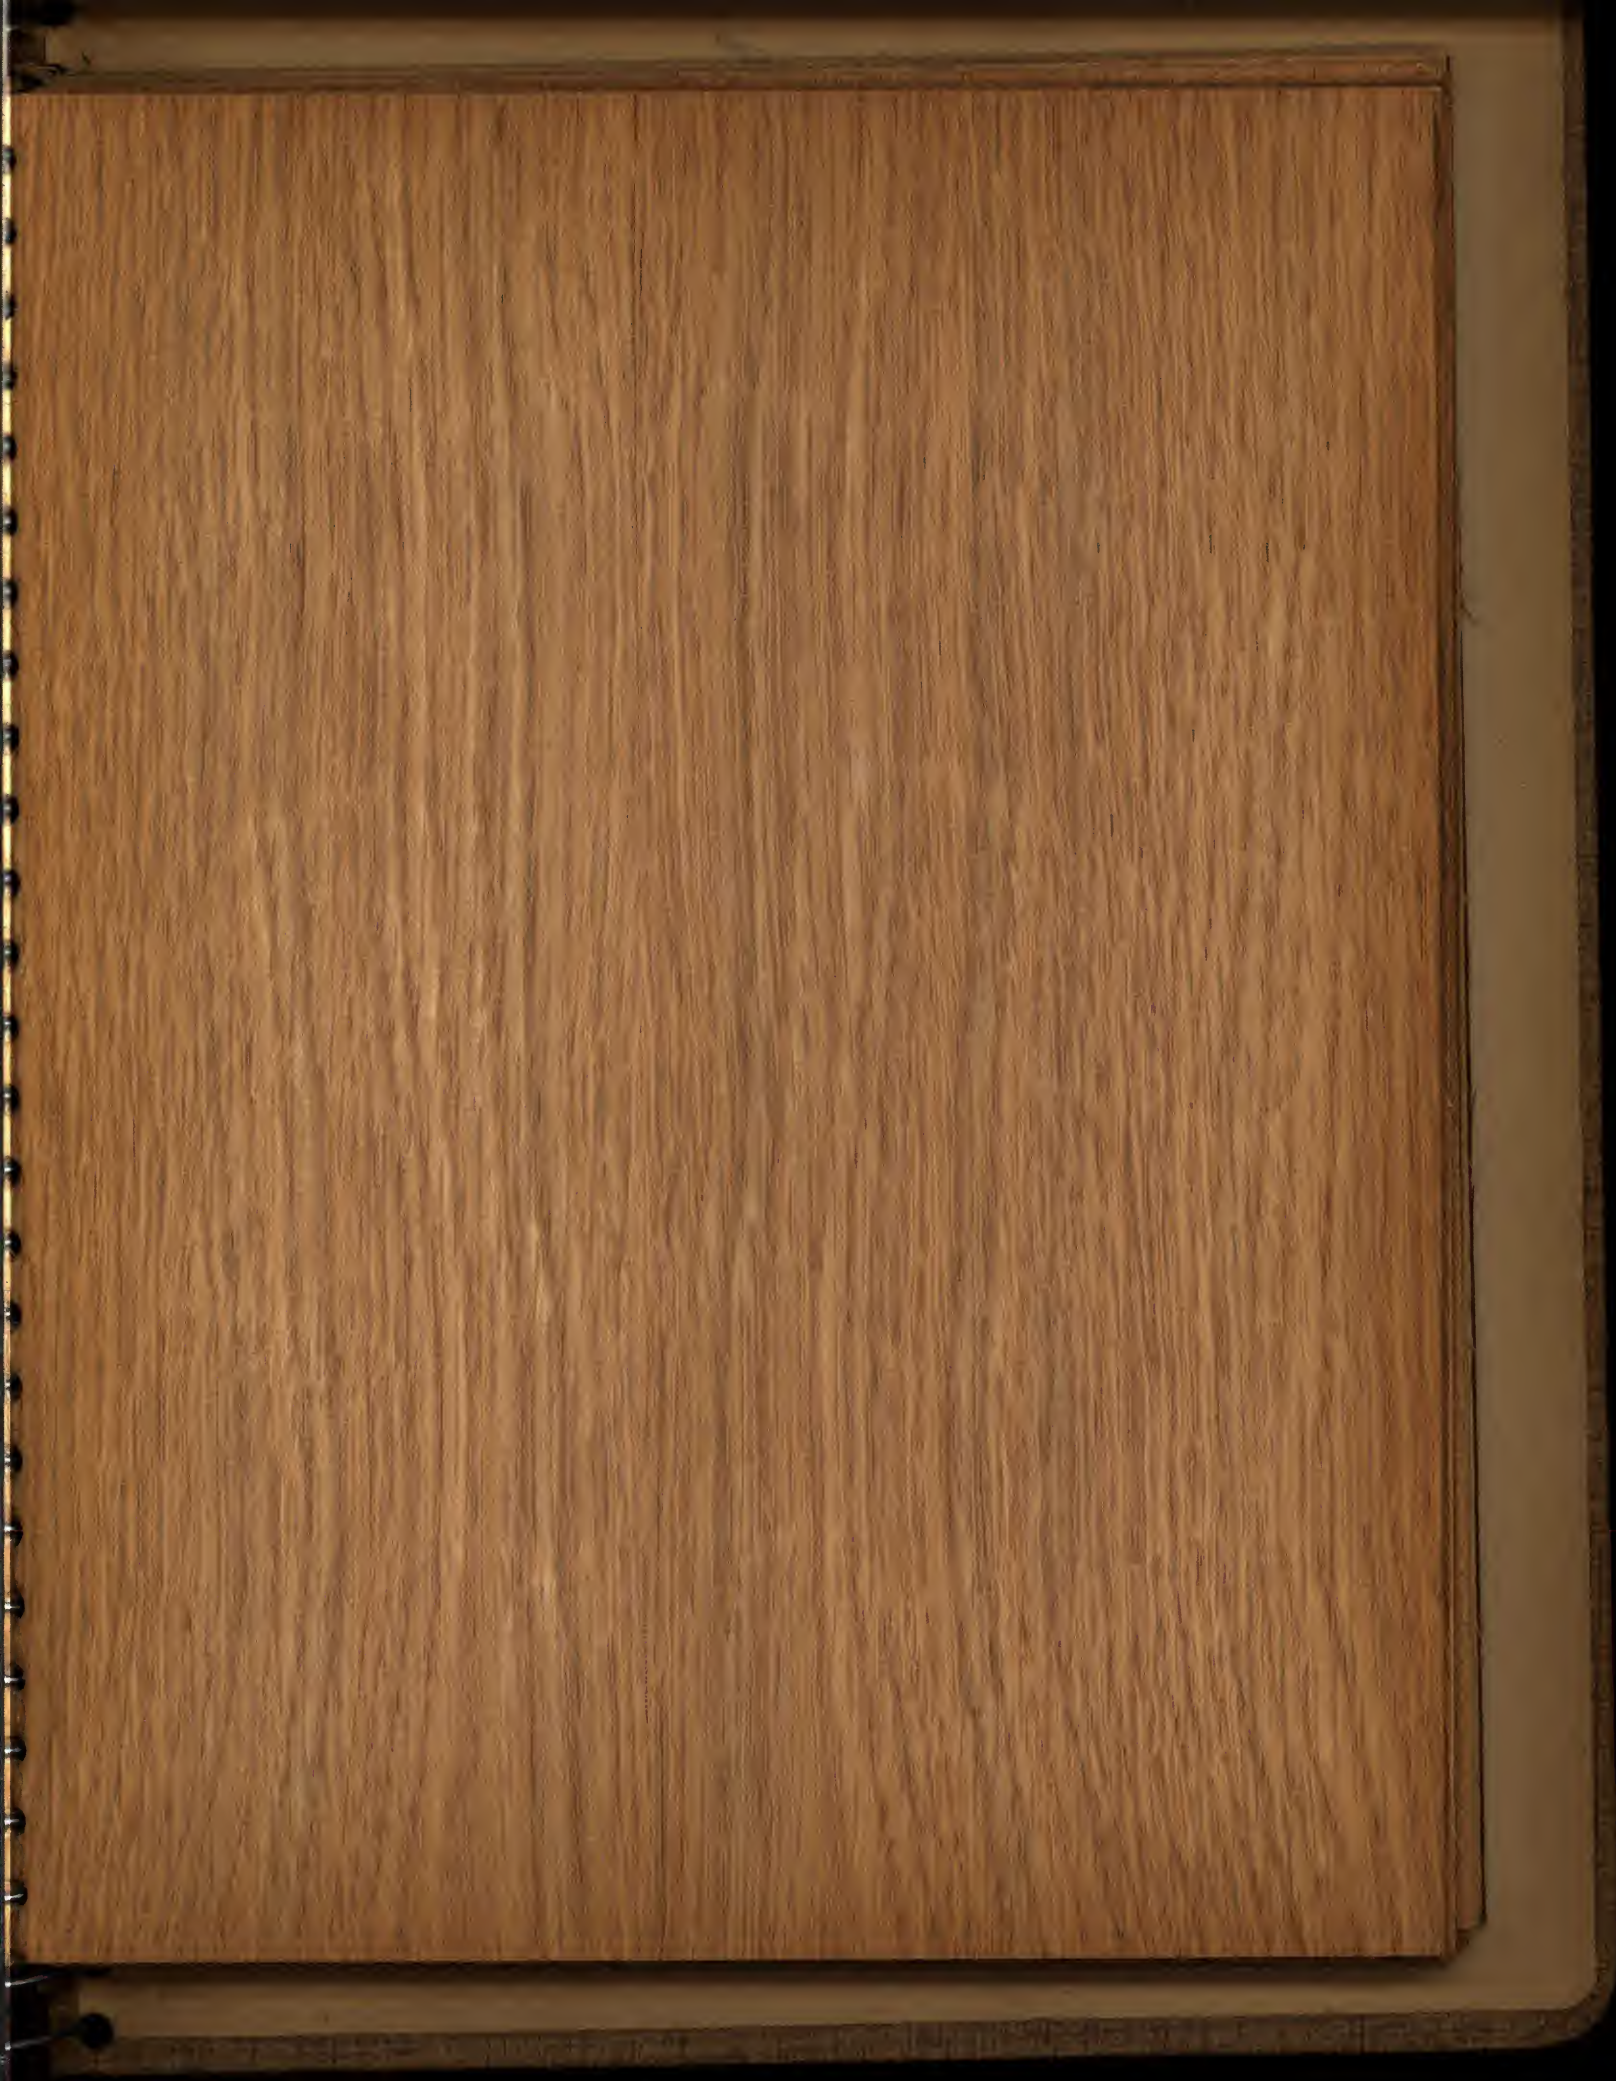

flexwood


ALL U.S. PAT. OFF. REG. NO. 18,835

FLEXWOOD DIVISION
UNITED STATES PLYWOOD CO., INC.
20 WEST 40th ST. NEW YORK 18, N.Y.

LIFT OAK



flexwood
NEW YORK, N.Y.
FLEXWOOD DESIGN
UNITED STATES
QUARTERED OAK

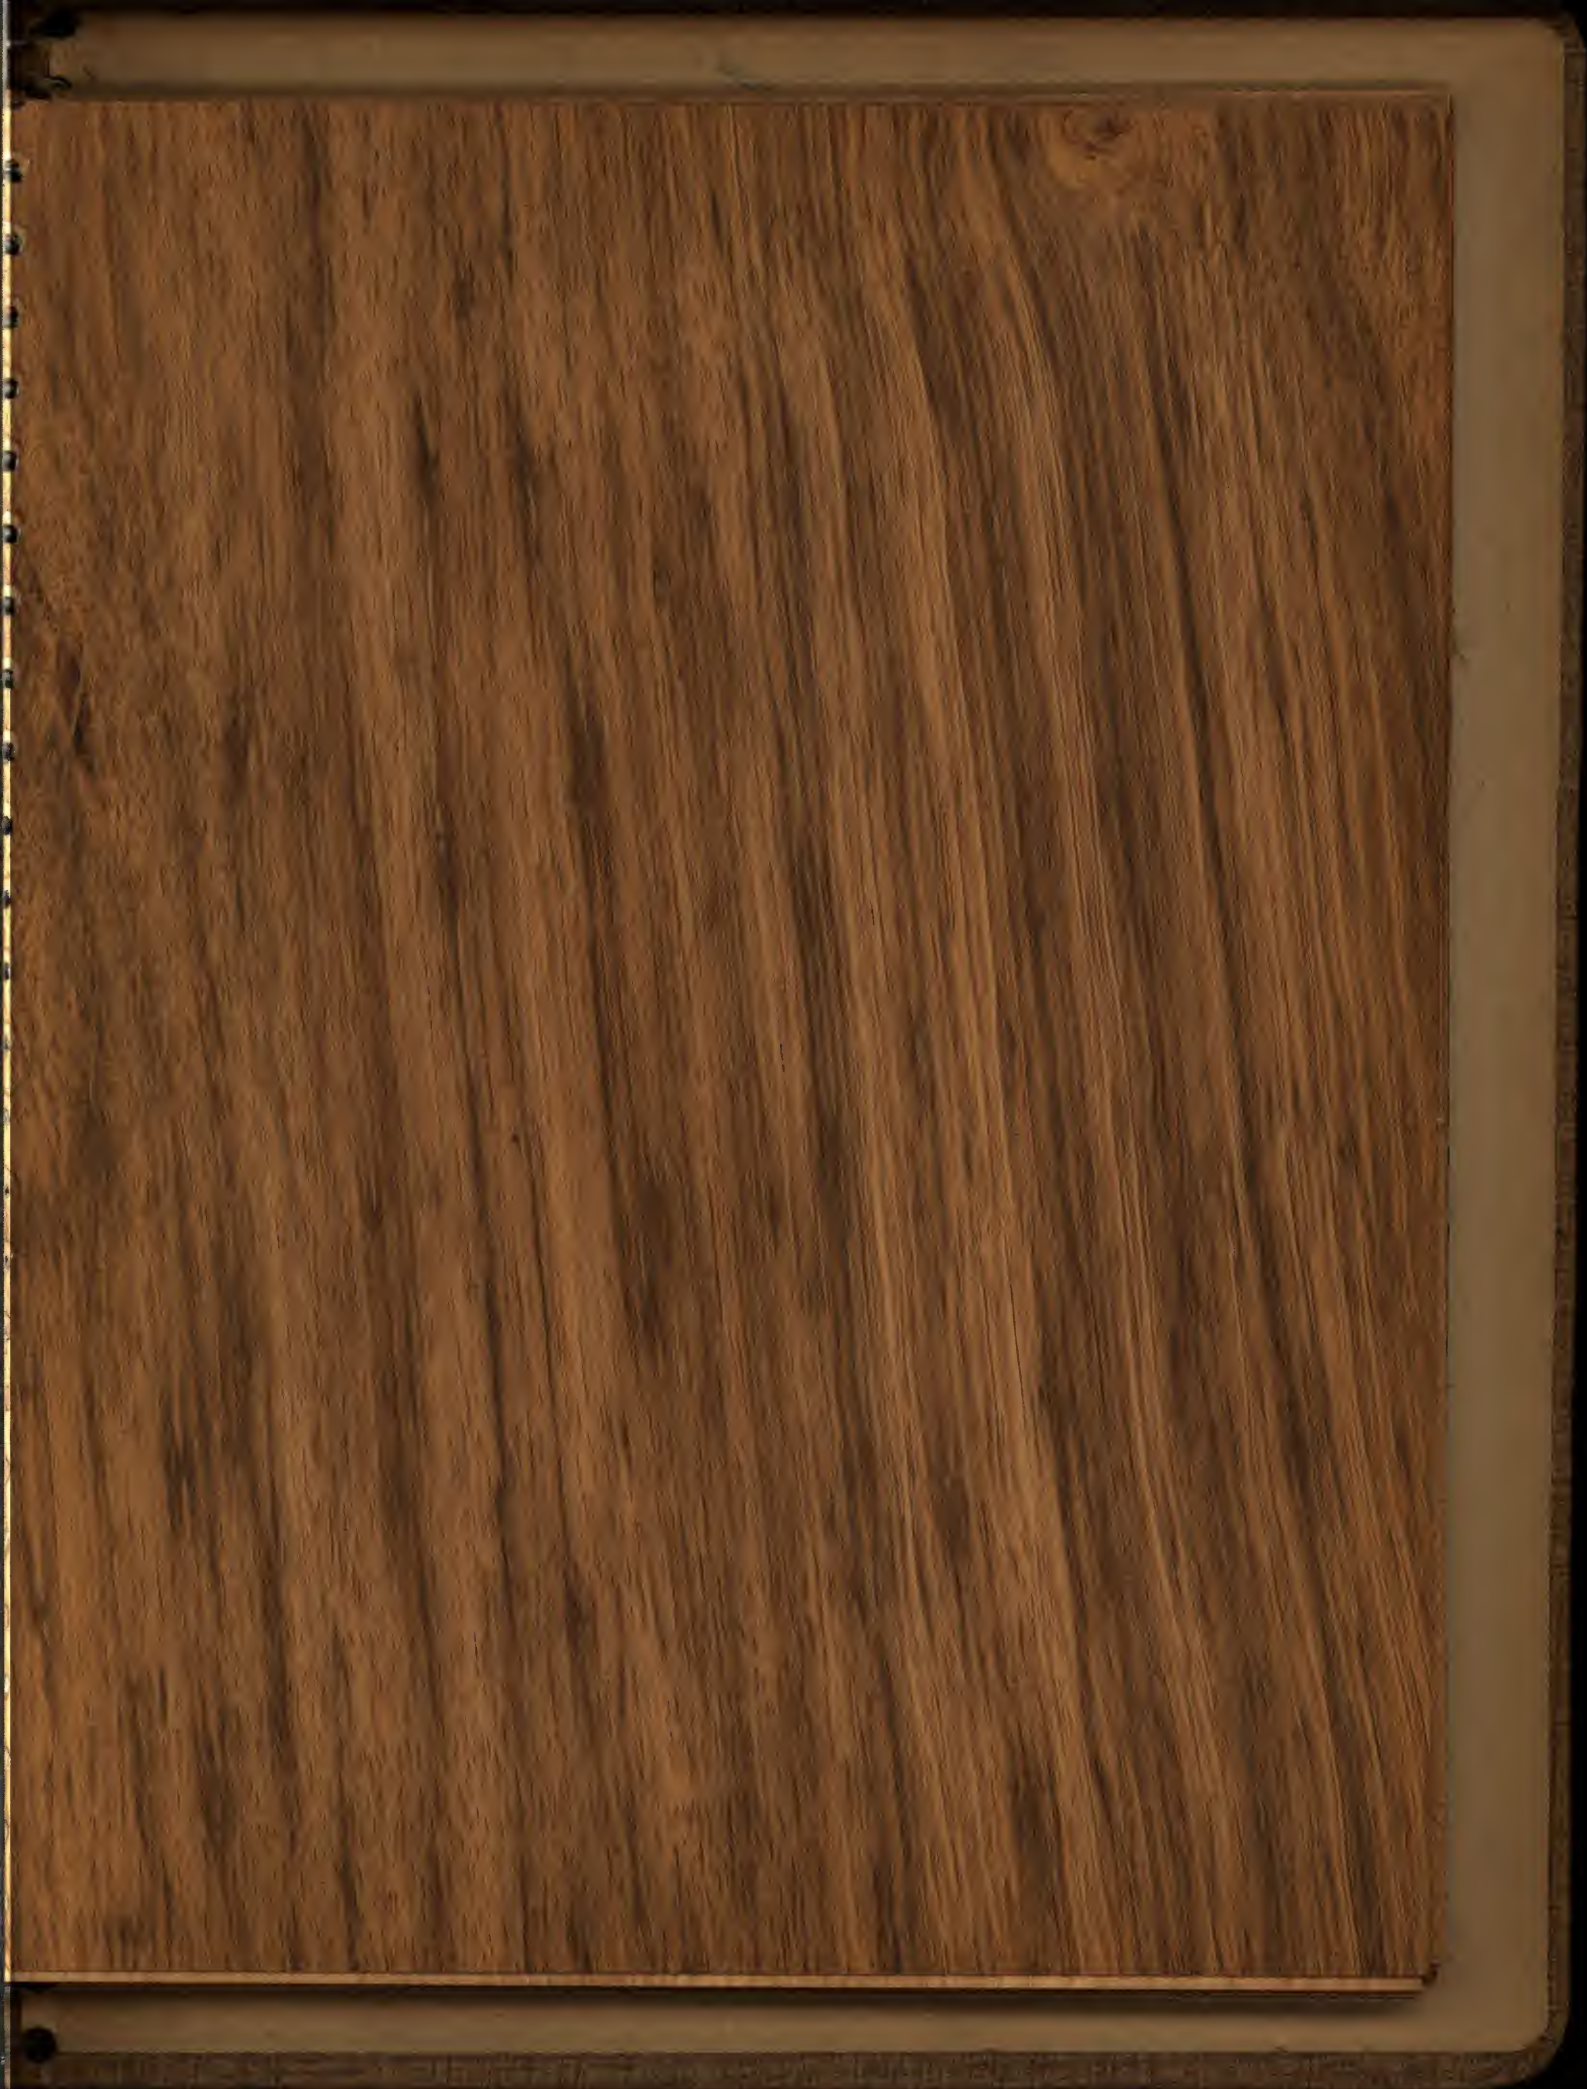



PRINTED BY THE UNIVERSITY OF CHICAGO PRESS
UNIVERSITY OF CHICAGO PRESS
55 WEST 40th ST.

ENGLISH OAK



Flexwood

MADE IN U.S.A. 1939
FLEXWOOD DIVISION
UNITED STATES FLYING CIRCLES, INC.
48 WALL ST. N.Y.C.

RED BIRCH



flexwood

ASK U.S. PAT. OFF. PAT. NO. 1,614,778

FLEXWOOD DIVISION
UNITED STATES

25 WASH. ST.

FIG. RED GUM



Flexwood

REG. U.S. PAT. OFF.



PAT. NO. 1,819,778

FLEXWOOD DIVISION
UNITED STATES PLYWOOD CO., INC.
3 West 44th St.
New York 36, N.Y.

LACEWOOD



flexwood

2018年12月18日

THE UNIVERSITY OF CHICAGO PRESS



flexwood

MADE IN U.S.A. PAT. OFF. REG. DES. 161,872



FLEXWOOD DIVISION

UNITED

SHAW

CO., INC.

NEW YORK, N. Y.

BELLA ROSA



flexwood

REG. U.S. PAT. OFF. MAR. 21, 1928. 1,819,778

**FLEXWOOD DIVISION
UNITED STATES PLYWOOD CO., INC.
88 West 44th St. New York, N. Y.**

TIGERWOOD



flexwood

MADE IN U.S.A. PAT. NO. 1,815,778

FLEXWOOD DIVISION

UNITED STATES PATENT & TRADEMARK OFFICE

NEW YORK, N.Y.

PLAIN MAPLE



flexiwood

NEW YORK, N.Y. PAT. NO. 1,814,728

FLEXWOOD DIVISION

UNITED STATES PATENT & TRADEMARK OFFICE

AS WASH. D.C.

CURLY MAPLE



flexwood



REG. U. S. PAT. OFF.

DES. REG. 154,719

FLEXWOOD DIVISION

UNITED STATES PLYWOOD CO., INC.

18 YEARS 1914-32

New York, N. Y.

BIRDSEYE MAPLE



flexwood

REGISTERED PATENT OFFICE



FLEXWOOD DIVISION
UNITED STATES PLYWOOD CO., INC.
NEW YORK, N.Y.

RIBBON PRIMA VERA



flexiwood

REG. U.S. PAT. OFF. PAT. NO. 2,815,812



FLEXWOOD DIVISION
UNITED STATES PLYWOOD CO., INC.
100 WALL STREET NEW YORK 7, N.Y.

FLAT CUT PRIMA VERA



flexwood

REGISTERED PAT. NO. 2,187,774

**FLEXWOOD DIVISION
UNITED STATES PLYWOOD CO., INC.**
15 WEST 54TH ST. New York, N. Y.

FIG. KORINA



Flexwood

REG. U.S. PAT. OFF. PAT. NO. 2,187,738

FLEXWOOD DIVISION
UNITED STATES PLYWOOD CO., INC.
NEW YORK, N. Y.

FIGURED ASPEN



flexwood

SEE U.S. PAT. OFF.  PAT. NO. 1,875,718

**FLEXWOOD DIVISION
UNITED STATES PLYWOOD CO., INC.**

60 West 44th St.

New York, N. Y.

AVODIRE



flexwood

MADE IN U.S.A. - PAT. NO. 2,187,872



FLEXWOOD DIVISION

UNITED STATES LUMBER CO., INC.

100 WALL STREET, NEW YORK, N.Y.

PALDAO



flexwood
NEW YORK, N.Y. 10017 TEL. (212) 681-1578

flexwood DIVISION
UNITED STATES OF AMERICA

SATINWOOD



flexwood

MADE IN U.S.A. PAT. OFF. DES. REG. NO. 1818778

FLEXWOOD DIVISION
UNITED STATES FLYING CO. INC.
65 West 44th St. New York 18, N.Y.

BUBINGA



flexwood

SEE THE FLEXWOOD

FLEXWOOD
UNITED STATES PATENT
NO. 2,444,444

MAKOR



Flexwood


REGISTERED TRADE MARK PAT. NO. 2,819,778

ALF WOOD DIVISION

UNITED STATES ALF WOOD CO., INC.

117-11 10th Ave. New York, N.Y.

FIGURED TEAK

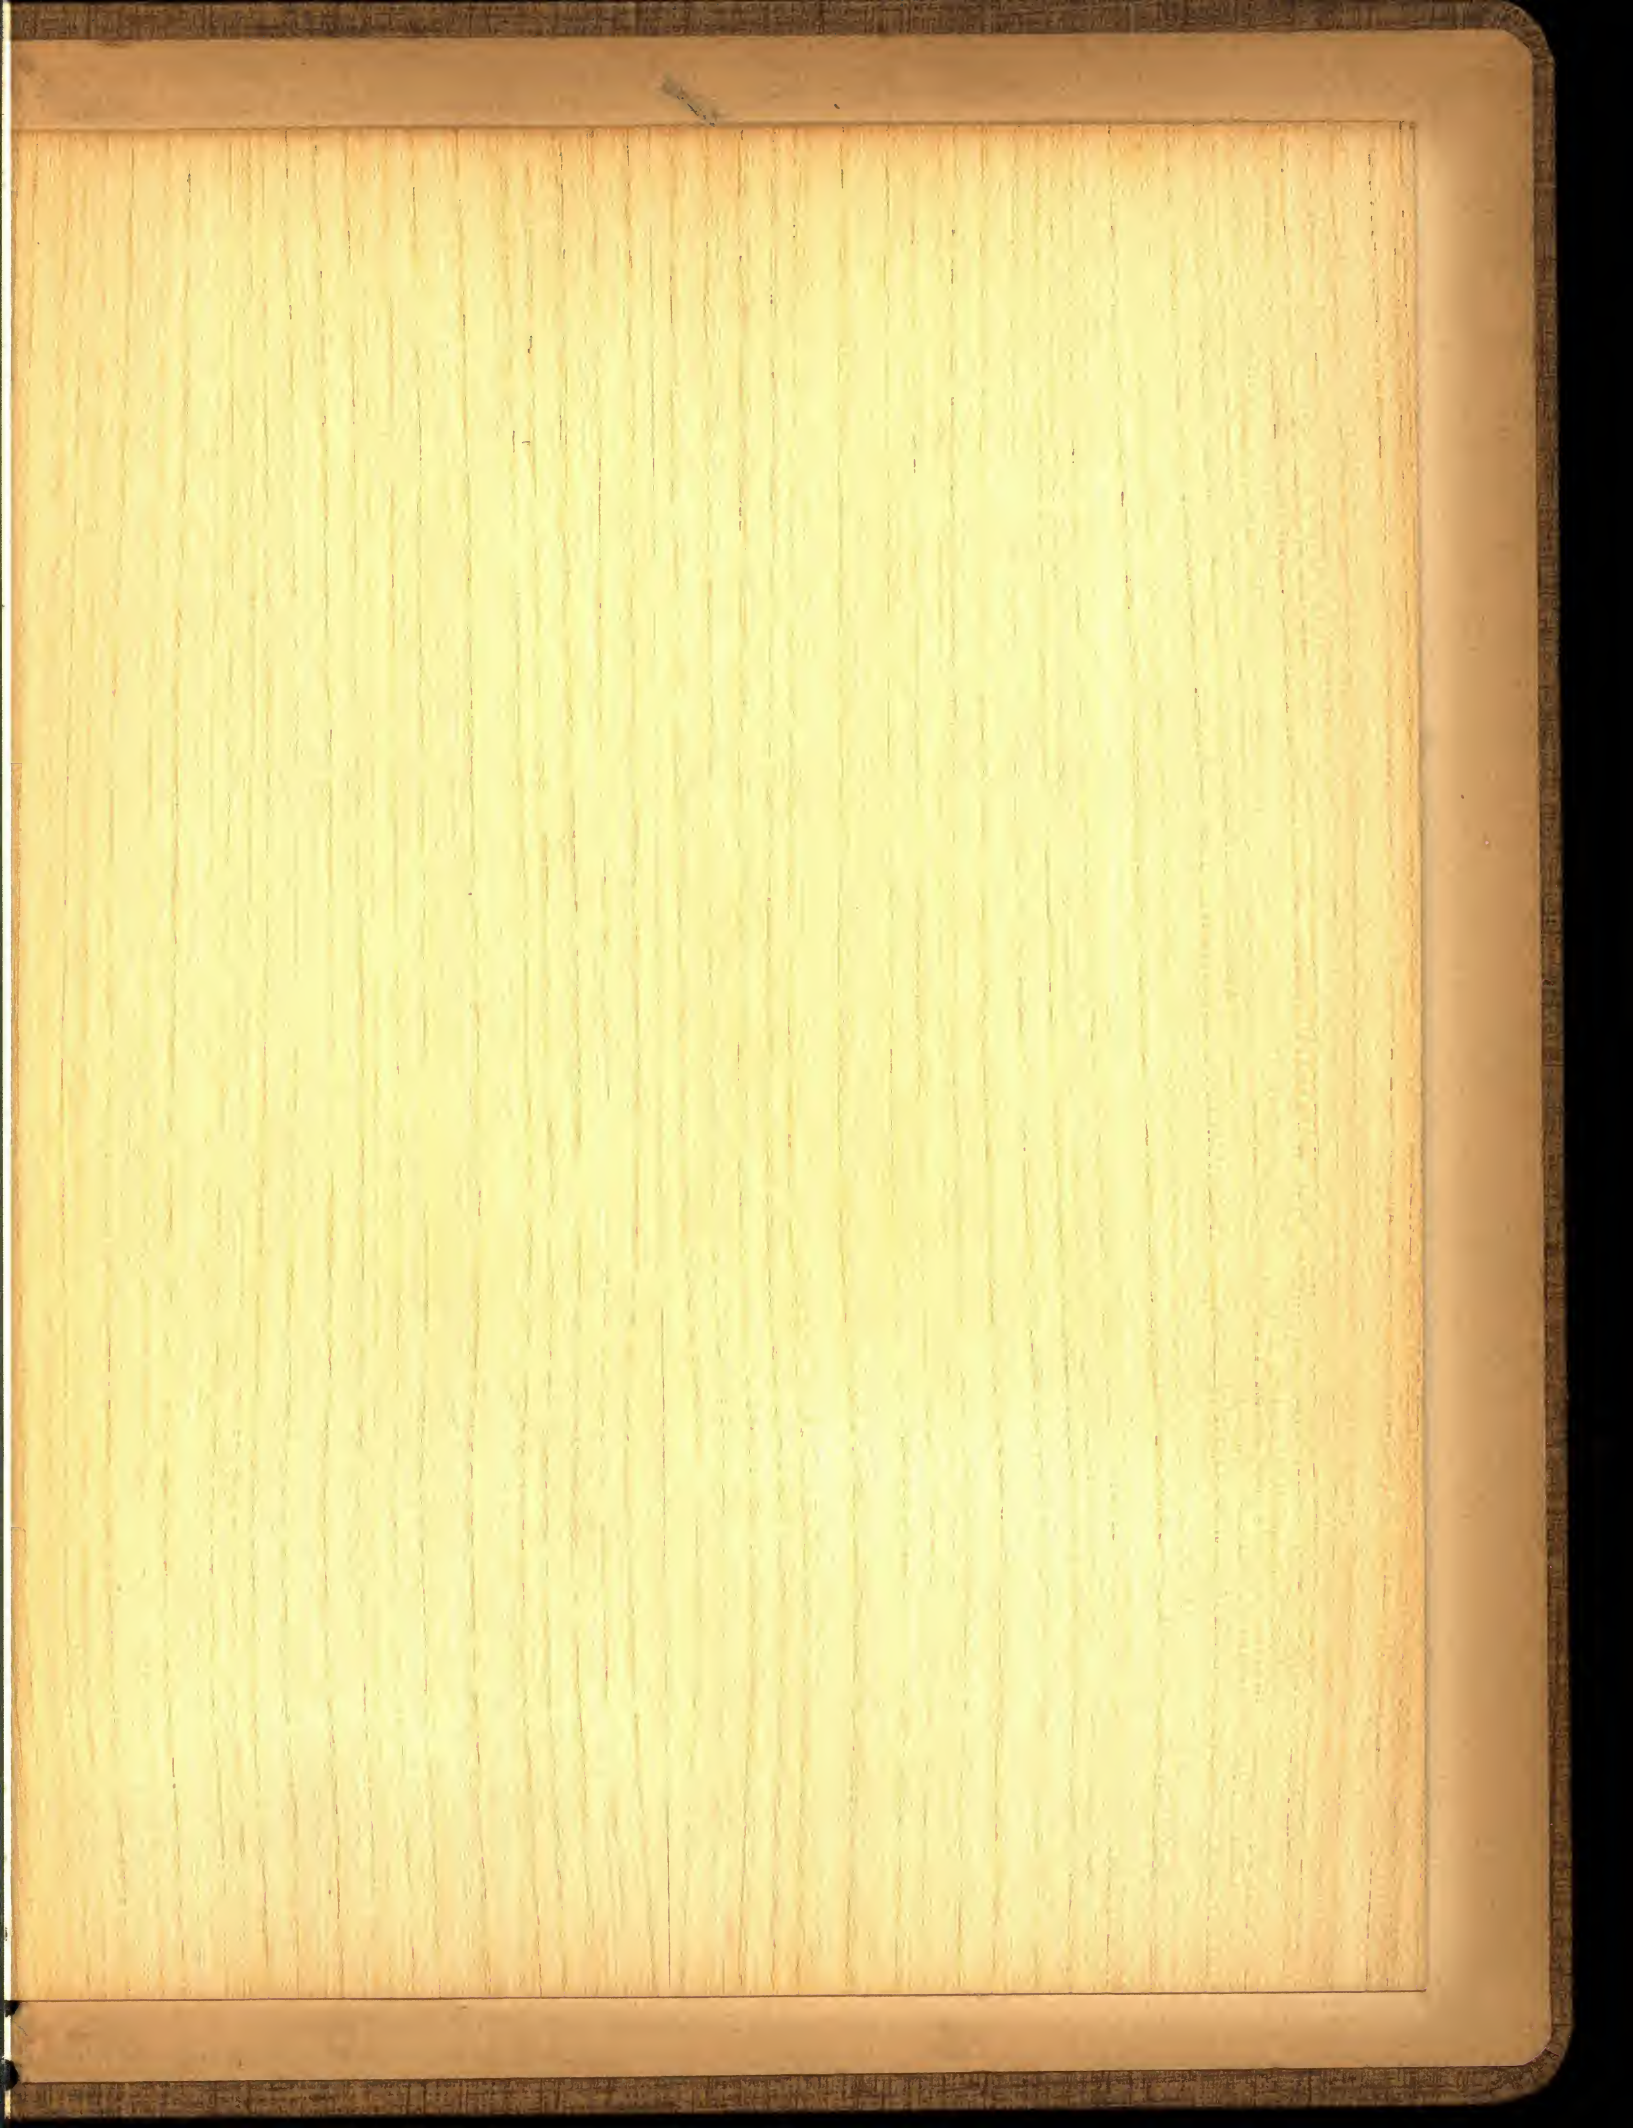

flexwood

NEW LONDON, CT. PAT. NO. 1,819,778

PLA. WOOD DIVISION

UNTEL

CO., INC.

NEW LONDON, CT.

LINNWOOD

Digitized by



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL
www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:

Mike Jackson, FAIA

